

DATA SHEET

U 5.165


ROTARY VANE– VACUUM PUMPS

oil-lubricated

air-cooled

MAKE IT BECKER.



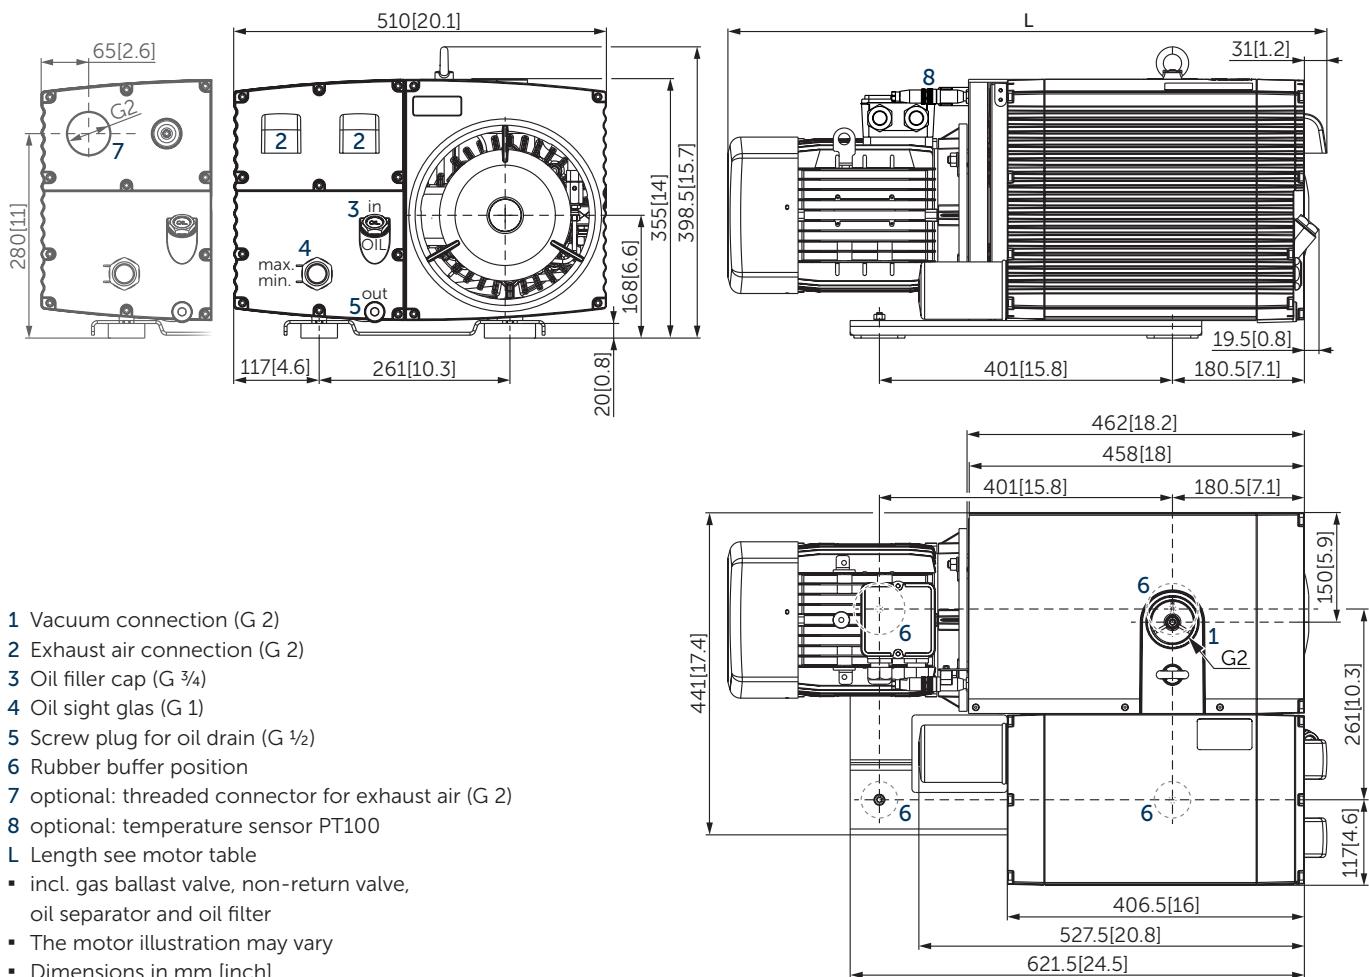

Nominal capacity	Vacuum absolute for continous operation				Motors		Emission sound pressure level ¹⁾		Weight w/o motor	Oil ²⁾
	m³/h 50 Hz	m³/h 60 Hz	mbar 50 Hz	mbar 60 Hz	kW 50 Hz	kW 60 Hz	dB(A) 50 Hz	dB(A) 60 Hz		
165	198	<0.1 (0.5 ³⁾)–100	<0.1 (0.5 ³⁾)–100	3.0	3.6	70	72	70	5	
165	198	<0.1 (0.5 ³⁾)–400	<0.1 (0.5 ³⁾)–400	4.0	4.8	70	72	70	5	

¹⁾ According to DIN EN ISO 11203, accuracy class of measurement: class 2, extended measurement uncertainty: 3 dB
 1 m [39.4 inch] distance, at medium load, both connection sides piped

²⁾ Becker Lube M100 mineral • S100 synthetic • SL100 food


³⁾ 0.5 mbar absolute with opened gas ballast valve

▪ Gas ballast valve: water vapour tolerance max. 7 mbar; water vapour capacity max. 0.3 l/h (at 85°C operating temperature)

▪ Current consumption and rotation speed may vary. Tolerance in each case -1.5/+2%

3~ Motors													L
#	50 Hz				60 Hz				Version		Weight		
	kW	V	min ⁻¹	A	kW	V	min ⁻¹	A			kg	mm [inch]	
01	3.0	Δ230/Y400	IE3	1458	11.4/6.57	3.6	Δ265/Y460 Δ230/Y400	IE3 –	1749 1736	11.2/6.48 12.0/6.94	UL (E365362), CSA IP 55, ISO F, bimetal	37	842 [33.2]
02						3.6	YY230/Y460 YY208	IE3 –	1750 1737	12.7/6.34	UL (E365362), CSA IP 55, ISO F, bimetal	37	842 [33.2]
03	3.0	Δ200/Y350	IE3	1463	12.9/7.47	3.6	Δ200/Y380–400 Δ200/Y350	IE3 –	1753 1739	13.2/7.6–7.24 13.8/8.0	UL (E365362), CSA IP 55, ISO F, bimetal	37	842 [33.2]
04						3.6	Δ400	IE3	1755	7.28	UL (E365362), CSA IP 55, ISO F, bimetal	37	842 [33.2]
05	4.0	Δ230/Y400	IE3	1450	14.9/8.6	4.8	Δ265/Y460 Δ230/Y400	IE3 –	1740 1710	14.8/8.5 16.0/9.2	UL (E365362), CSA IP 55, ISO F, bimetal	34	820 [32.3]
06						4.8	YY230/Y460 YY208	IE3 –	1740 1710		UL (E365362), CSA IP 55, ISO F, bimetal	34	820 [32.3]
07	4.0	Δ200/Y350				4.8	Δ200/Y380–400 Δ200/Y350	IE3 –	1740 1710		UL (E365362), CSA IP 55, ISO F, bimetal	34	820 [32.3]
08						4.8	Δ400	IE3	1740	9.8	UL (E365362), CSA IP 55, ISO F, bimetal	34	820 [32.3]

- Current consumption and rotation speed may vary. Tolerance in each case -1.5/+2%



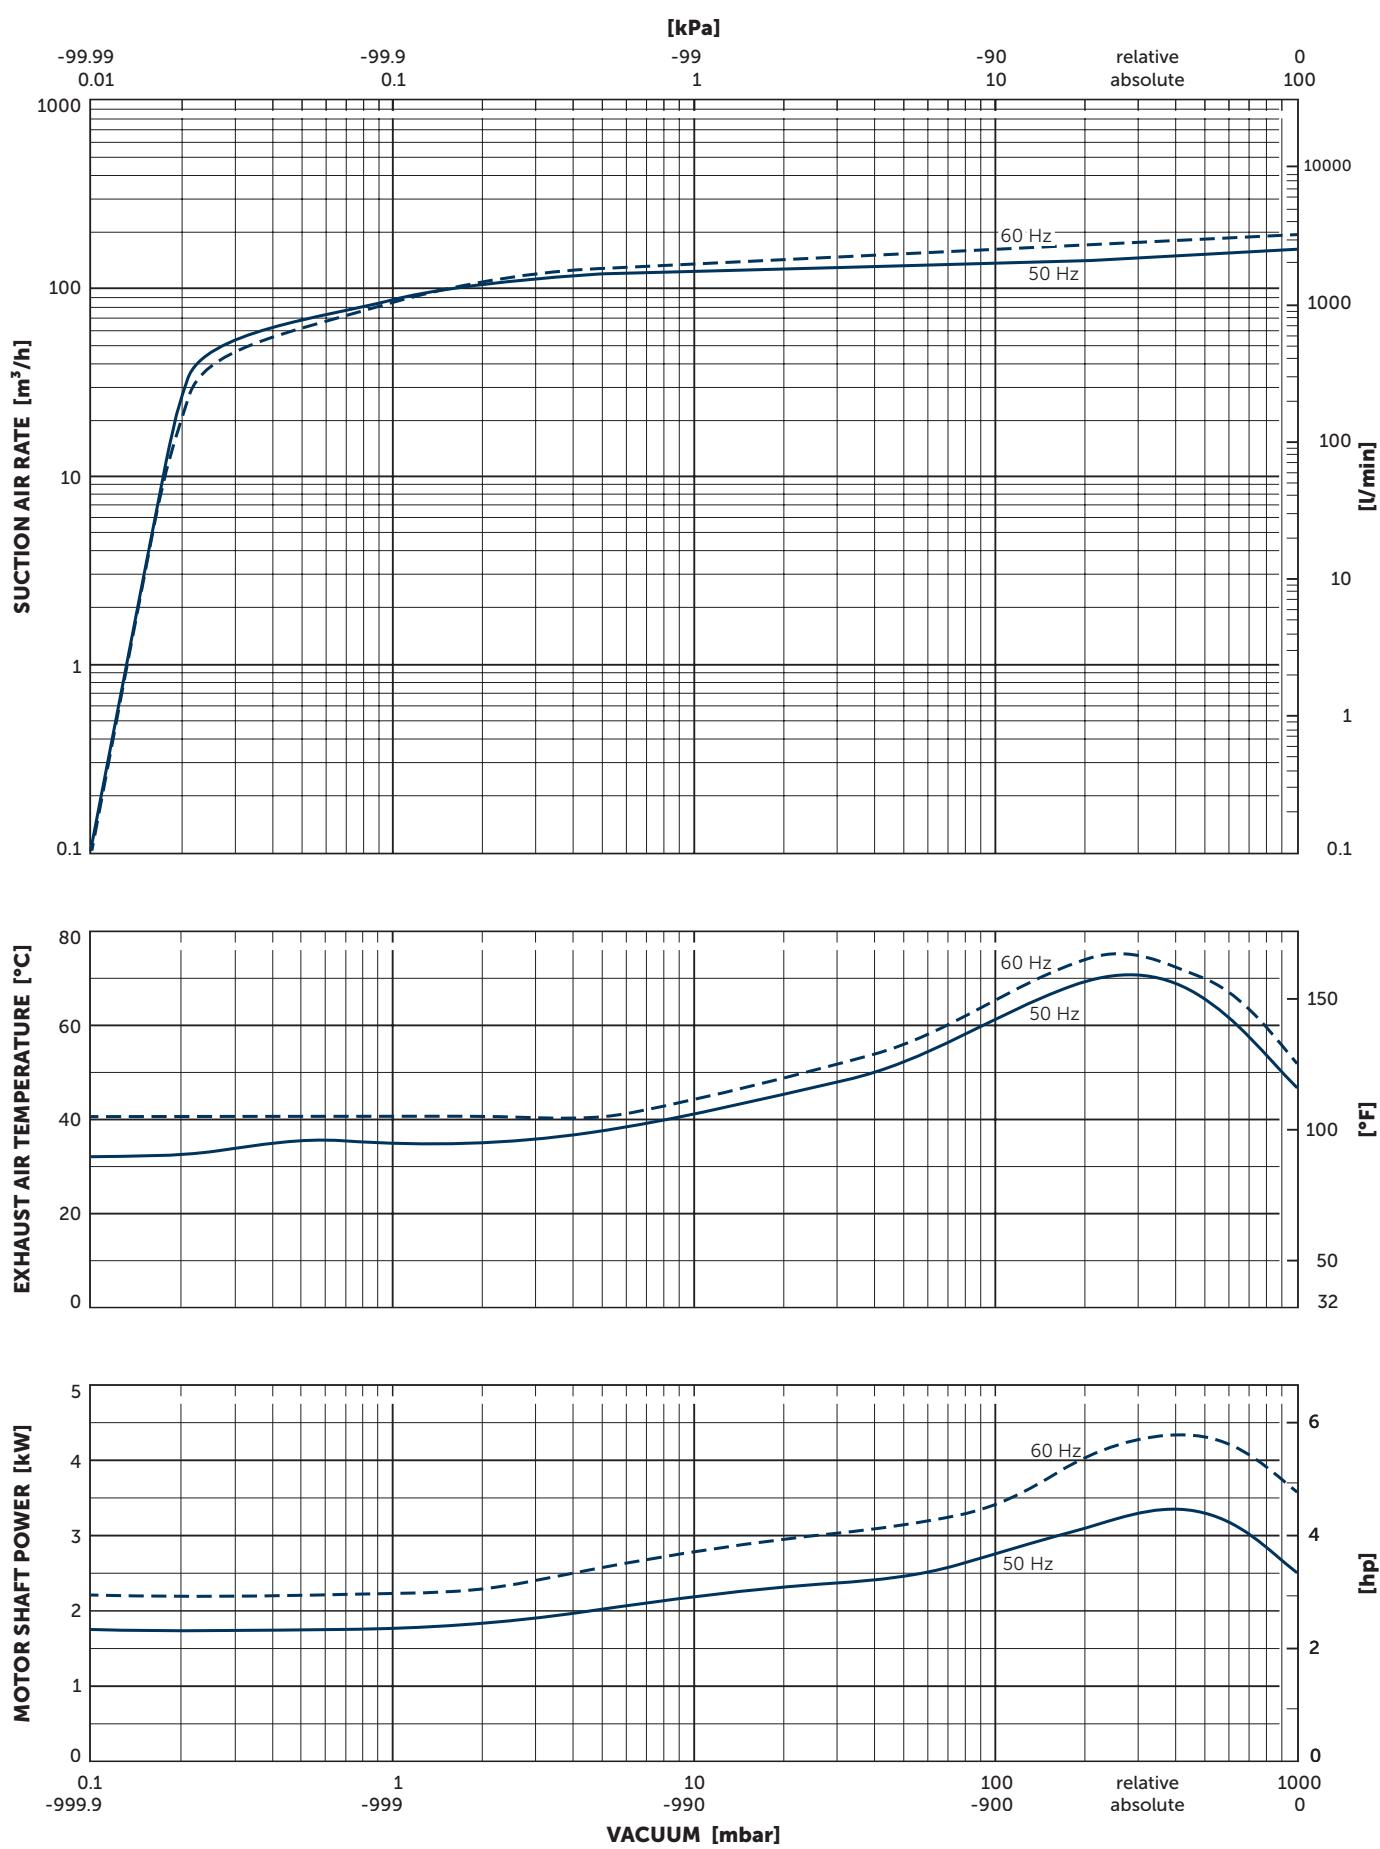


Suction air rate refers to the intake pressure
 Reference data (atmosphere): 1000 mbar (100 kPa), 20°C (68°F)
 Tolerance: ±10%

VARIANTS AND ACCESSORIES

U 5.165/0-62XL



- Enlarged oil tank and high efficient triple stage oil separation
- Weight without motor: 80 kg, oil quantity: 10 l, further technical data, motors and characteristic curves like standard pump

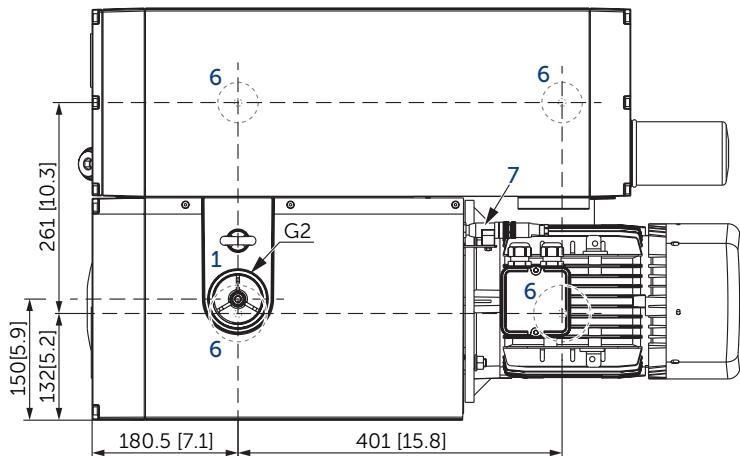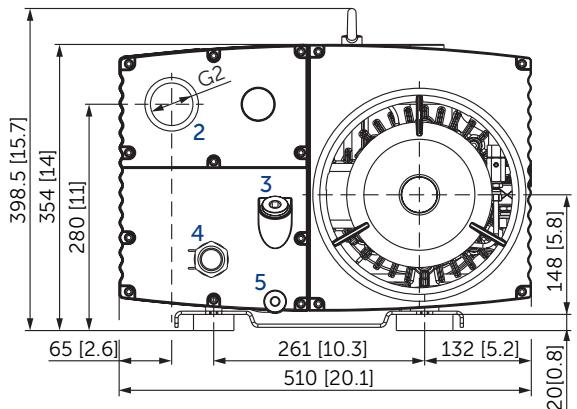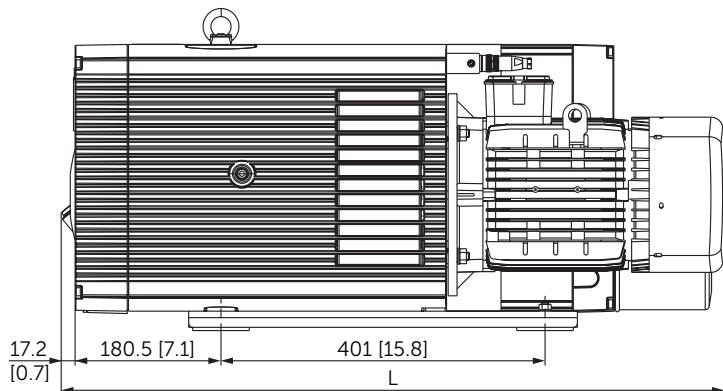

- 1 Vacuum connection (G 2)
 - 2 Exhaust air connection (G 2)
 - 3 Oil filler cap (G ¾)
 - 4 Oil sight glas (G 1)
 - 5 Screw plug for oil drain (G ½)
 - 6 Rubber buffer position
 - 7 Optional temperature sensor PT100
- L Length see motor table
 ▪ incl. gas ballast valve, non-return valve, oil separator and oil filter
 ▪ The motor illustration may vary
 ▪ Dimensions in mm [inch]

OTHER VARIANTS AND ACCESSORIES

- **U 5.165 O2-PACK**¹⁾ for packaging with an overconcentration of oxygen
- 1 Threaded connector for exhaust air (G 2)
- 2 Oil level switch¹⁾ (G 1)
- 3 Oil temperature monitor¹⁾ (G ½)
- 4 Maintenance indicator¹⁾ (G ¾) for oil separating elements
- 5 Ball valve (G ½), with locking and hose connector 19 mm
- Gas ballast valve for increased water vapour tolerance (3.0 mbar abs.), water vapour tolerance:
max. 50 mbar; water vapour capacity: max. 2.0 l/h (at 85°C operating temperature)
- Temperature sensor PT100
- External suction filter
- Oil: Becker Lube M100 mineral, S100 synthetic and SL100 food
- Water cooler U5.200-0-114.2¹⁾ with connectors for hoses with an external diameter of 8 mm

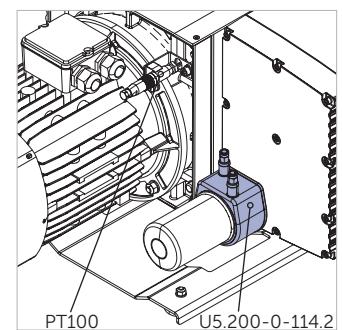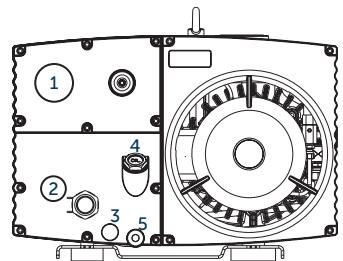

Oil level switch



Oil temperature monitor



Maintenance indicator



Ball valve

¹⁾ See separate data sheet

▪ Combination options on request

MAKE IT BECKER.

