





# **VARIAIR K VX 3.80/0-400**

## **ROTARY VANE VACUUM PUMPS**


oil-free, air-cooled  
frequency inverter

**MAKE IT BECKER.**



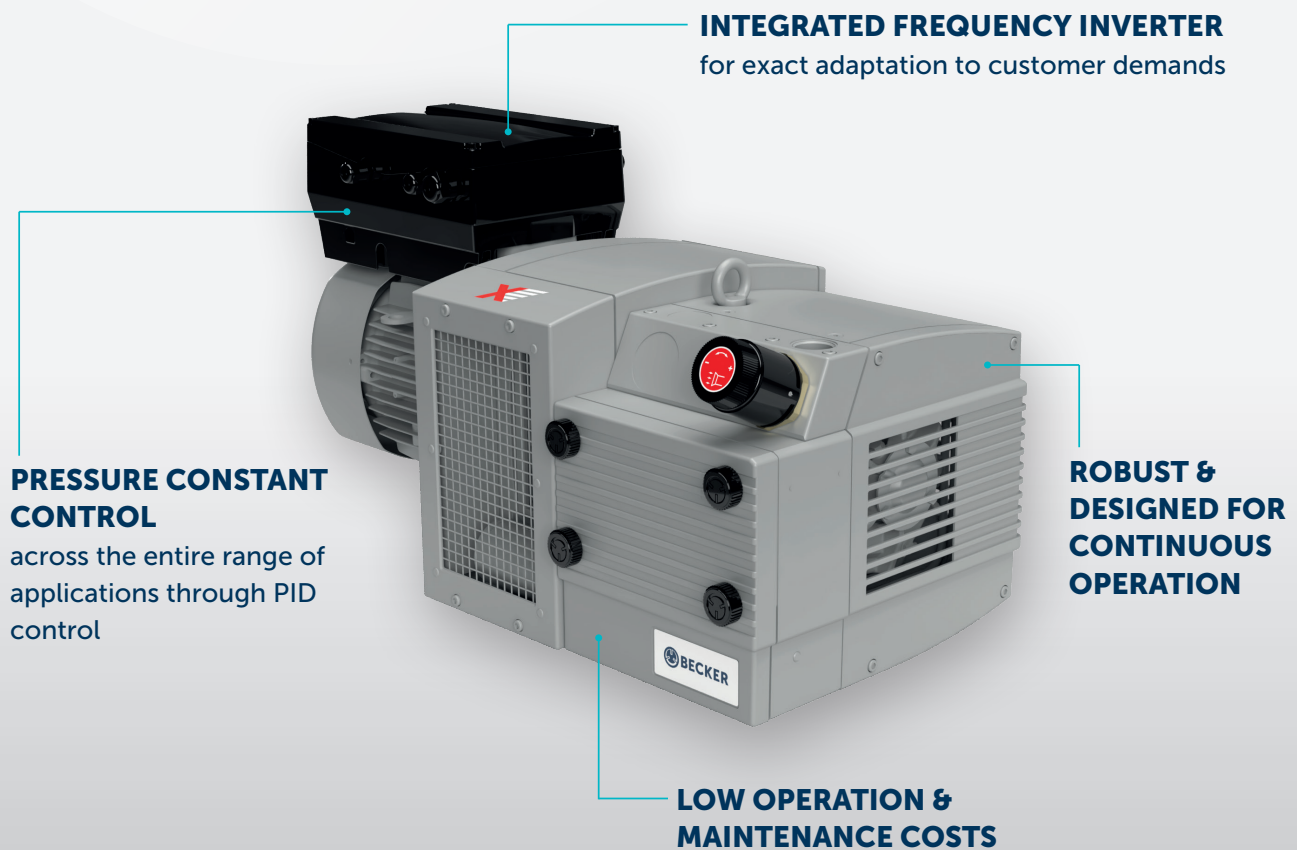


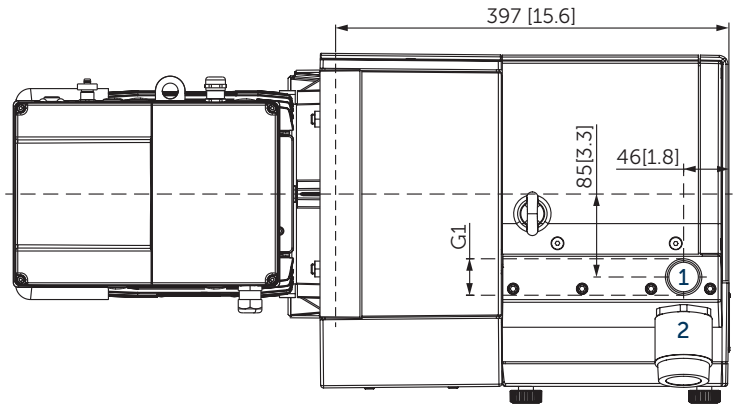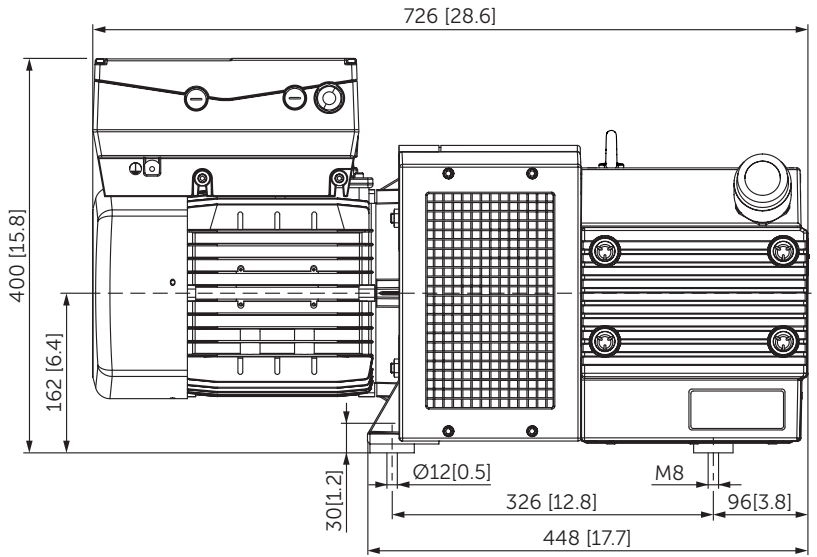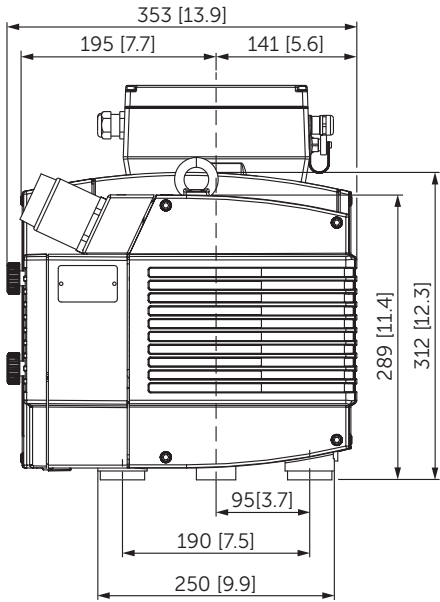

- 1 Vacuum connection (G1)  
2 Vacuum regulating valve
- Including integrated suction air filter and blow-off valve
  - The motor illustration may vary.
  - Dimensions in mm [inch]

Suction air rate	Vacuum absolute	Frequency	Emission sound pressure level <sup>1)</sup>	Weight	 Frequency inverter <sup>2)</sup> VAU-B
m <sup>3</sup> /h max.	mbar max.	Hz	dB(A)	kg	
76	100	30-60	67	88.5	400-480 V ±10% 50/60 Hz

<sup>1)</sup> According to DIN EN ISO 3744 (KpA = 3 dB(A)), 1 m [39.4 inch] distance, at medium load, both connection sides piped  
<sup>2)</sup> For details see frequency inverter operating instructions

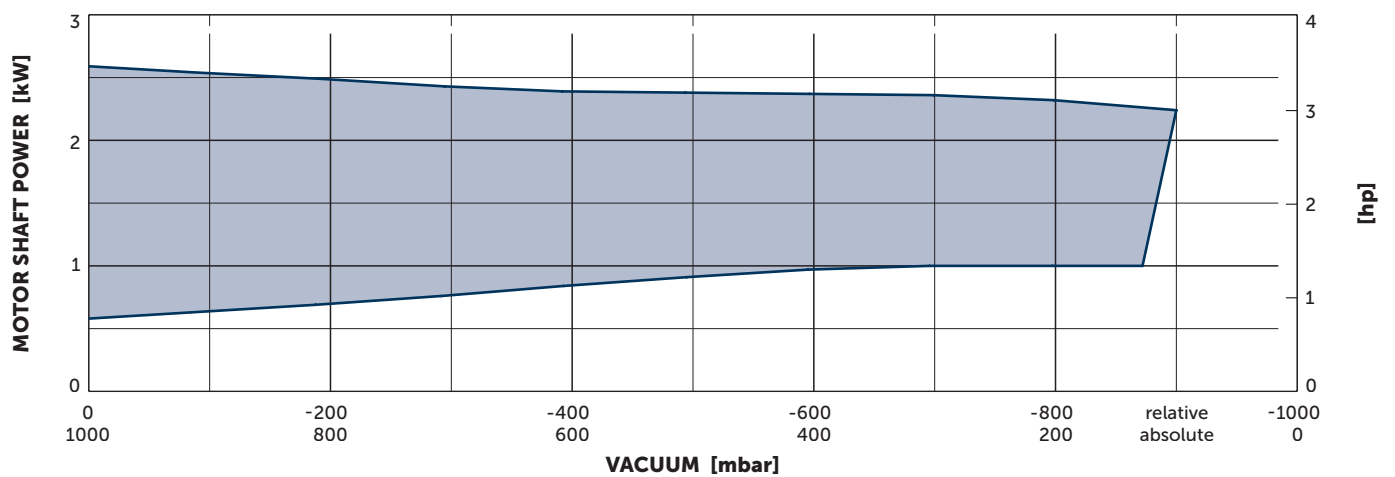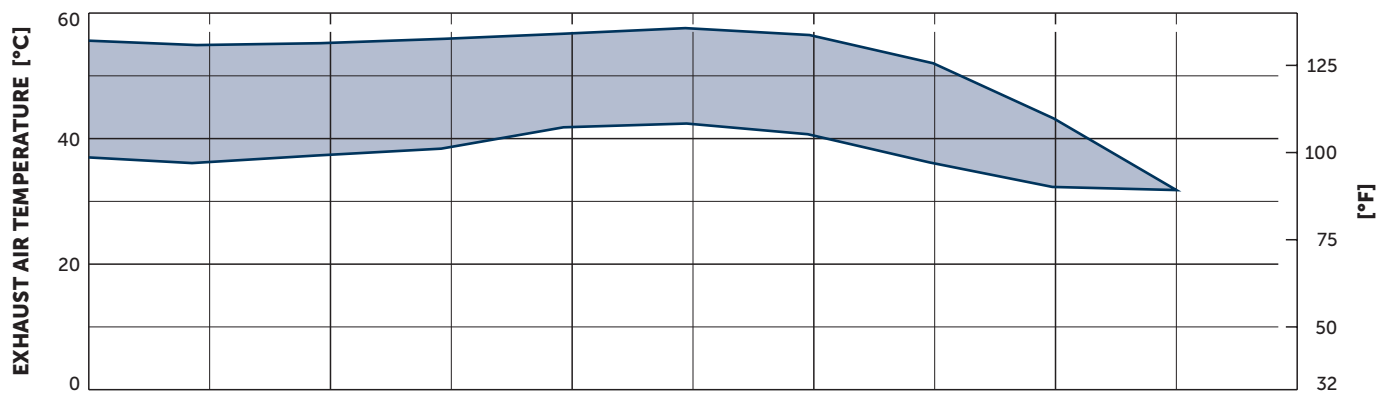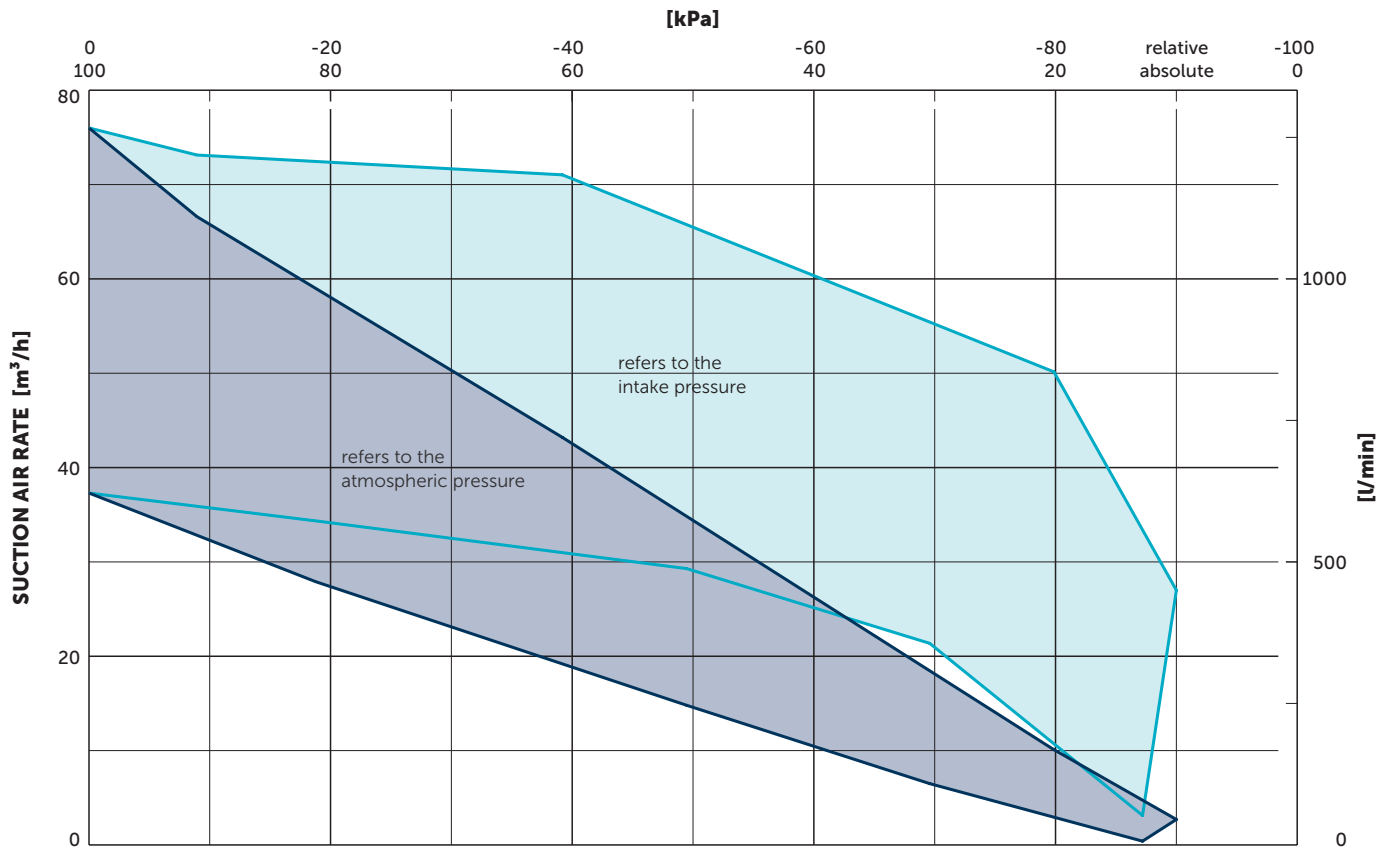

Reference data (atmosphere): 1000 mbar (100 kPa), 20°C (68°F)  
Tolerance:  $\pm 5\%$

**MAKE IT BECKER.**

HOMEPAGE  
KVX SERIES



ONLINE SHOP  
KVX 3.80/0-400

